



**PDU - 19" 1U**  
Standart


Anodized aluminium profile body  
16 A, 250 V AC (50-60 Hz)  
Maximum power 3500 W  
Earthing contact socket outlet  
(German type)  
Socket inserts set at 45°  
2 mt. 3x1,5 mm<sup>2</sup>, earthed cord, black  
IP 20

TS IEC 60884-1 and TS 40

Item Number	Specification
8010 - 106	6 sockets
8010 - 107	7 sockets
8010 - 108	8 sockets
8010 - 109	9 sockets

### Optional

- C13, C14, C19, C20 types of socket inserts and plugs (IEC 320, BS 1363)
- Cordless
- Child lock

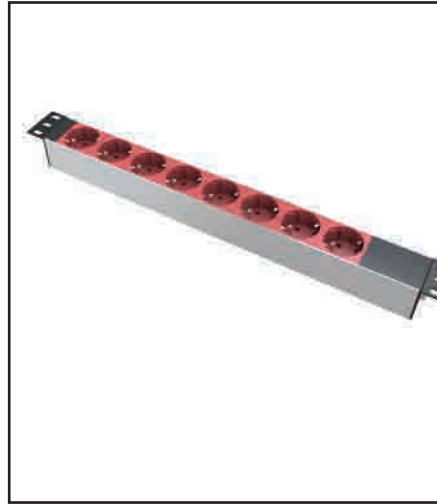

**PDU - 19" 1U**  
UPS


Anodized aluminium profile body  
16 A, 250 V AC (50-60 Hz)  
Maximum power 3500 W  
Earthing contact socket outlets  
(German type)  
Socket insert UPS  
Socket inserts set at 45°  
2 mt. 3x1,5 mm<sup>2</sup>, earthed cord, black  
IP 20

TS IEC 60884-1 and TS 40

Item Number	Specification
8010 - 206	6 sockets, UPS
8010 - 207	7 sockets, UPS
8010 - 208	8 sockets, UPS
8010 - 209	9 sockets, UPS

### Optional

- C13, C14, C19, C20 types of socket inserts and plugs (IEC 320, BS 1363)
- Cordless
- Child lock

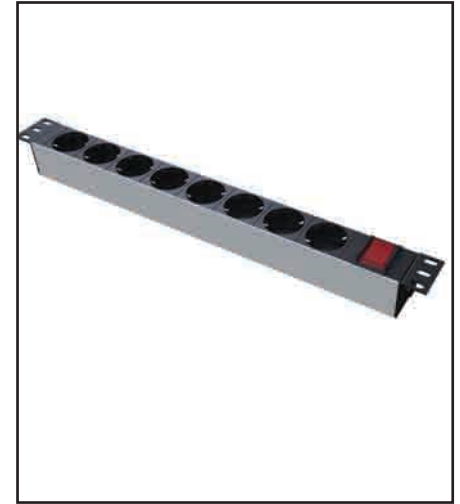

**PDU - 19" 1U**  
Two-phased On-Off Switch (illuminated)

Anodized aluminium profile body  
16 A, 250 V AC (50-60 Hz)  
Maximum power 3500 W  
Earthing contact socket outlets  
(German type)  
Two-phased on-Off switch (illuminated)  
Socket inserts set at 45°  
2 mt. 3x1,5 mm<sup>2</sup>, earthed cord, black  
IP 20

TS IEC 60884-1 and TS 40

Item Number	Specification
8020 - 105	5 sockets, On-off switch
8020 - 106	6 sockets, On-off switch
8020 - 107	7 sockets, On-off switch
8020 - 108	8 sockets, On-off switch

### Optional

- C13, C14, C19, C20 types of socket inserts and plugs (IEC 320, BS 1363)
- Cordless
- Child lock