



PDU - 19" 1U
Miniature Circuit Breaker (MCB) (2P)


Anodized aluminium profile body
16 A, 250 V AC (50-60 Hz)
Maximum power 3500 W
Earthing contact socket outlets
(German type)
Miniature Circuit Breaker (MCB) (2P)
Socket inserts set at 45°
2 mt. 3x1,5 mm², earthed cord, black
IP 20

TS IEC 60884-1 and TS 40

Item Number	Specification
8090 - 103	3 sockets, MCB (2P)
8090 - 104	4 sockets, MCB (2P)
8090 - 105	5 sockets, MCB (2P)
8090 - 106	6 sockets, MCB (2P)

Optional

- C13, C14, C19, C20 types of socket inserts and plugs (IEC 320, BS 1363)
- Cordless
- Child lock

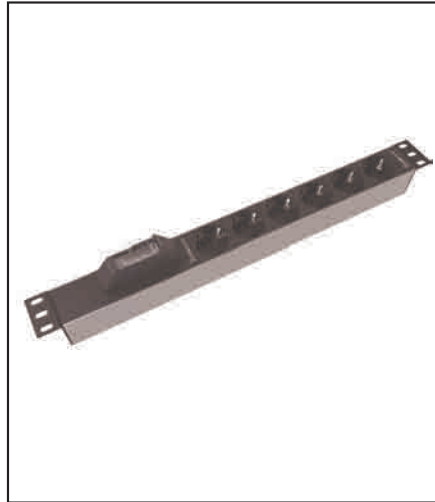

PDU - 19" 1U
Powermeter (kWh Active Energy)

Anodized aluminium profile body
16 A, 250 V AC (50-60 Hz)
Maximum power 3500 W
Earthing contact socket outlets
(German type)
Powermeter (kWh Active Energy)
Socket inserts set at 45°
2 mt. 3x1,5 mm², earthed cord, black
IP 20

TS IEC 60884-1 and TS 40

Item Number	Specification
8230 - 103	3 sockets, Powermeter
8230 - 104	4 sockets, Powermeter
8230 - 105	5 sockets, Powermeter
8230 - 106	6 sockets, Powermeter

Optional

- C13, C14, C19, C20 types of socket inserts and plugs (IEC 320, BS 1363)
- Cordless
- Child lock



PDU - 19" 1U
Powermeter (kWh Active Energy)
Miniature Circuit Breaker (MCB) (1P)

Anodized aluminium profile body
16 A, 250 V AC (50-60 Hz)
Maximum power 3500 W
Earthing contact socket outlets
(German type)
Powermeter (kWh Active Energy)
Miniature Circuit Breaker (MCB) (1P)
Socket inserts set at 45°
2 mt. 3x1,5 mm², earthed cord, black
IP 20

TS IEC 60884-1 and TS 40

Item Number	Specification
8240 - 103	3 sockets, Powermeter, MCB (1P)
8240 - 104	4 sockets, Powermeter, MCB (1P)
8240 - 105	5 sockets, Powermeter, MCB (1P)
8240 - 106	6 sockets, Powermeter, MCB (1P)

Optional

- C13, C14, C19, C20 types of socket inserts and plugs (IEC 320, BS 1363)
- Cordless
- Child lock